



RYSON SPIRAL CONVEYORS

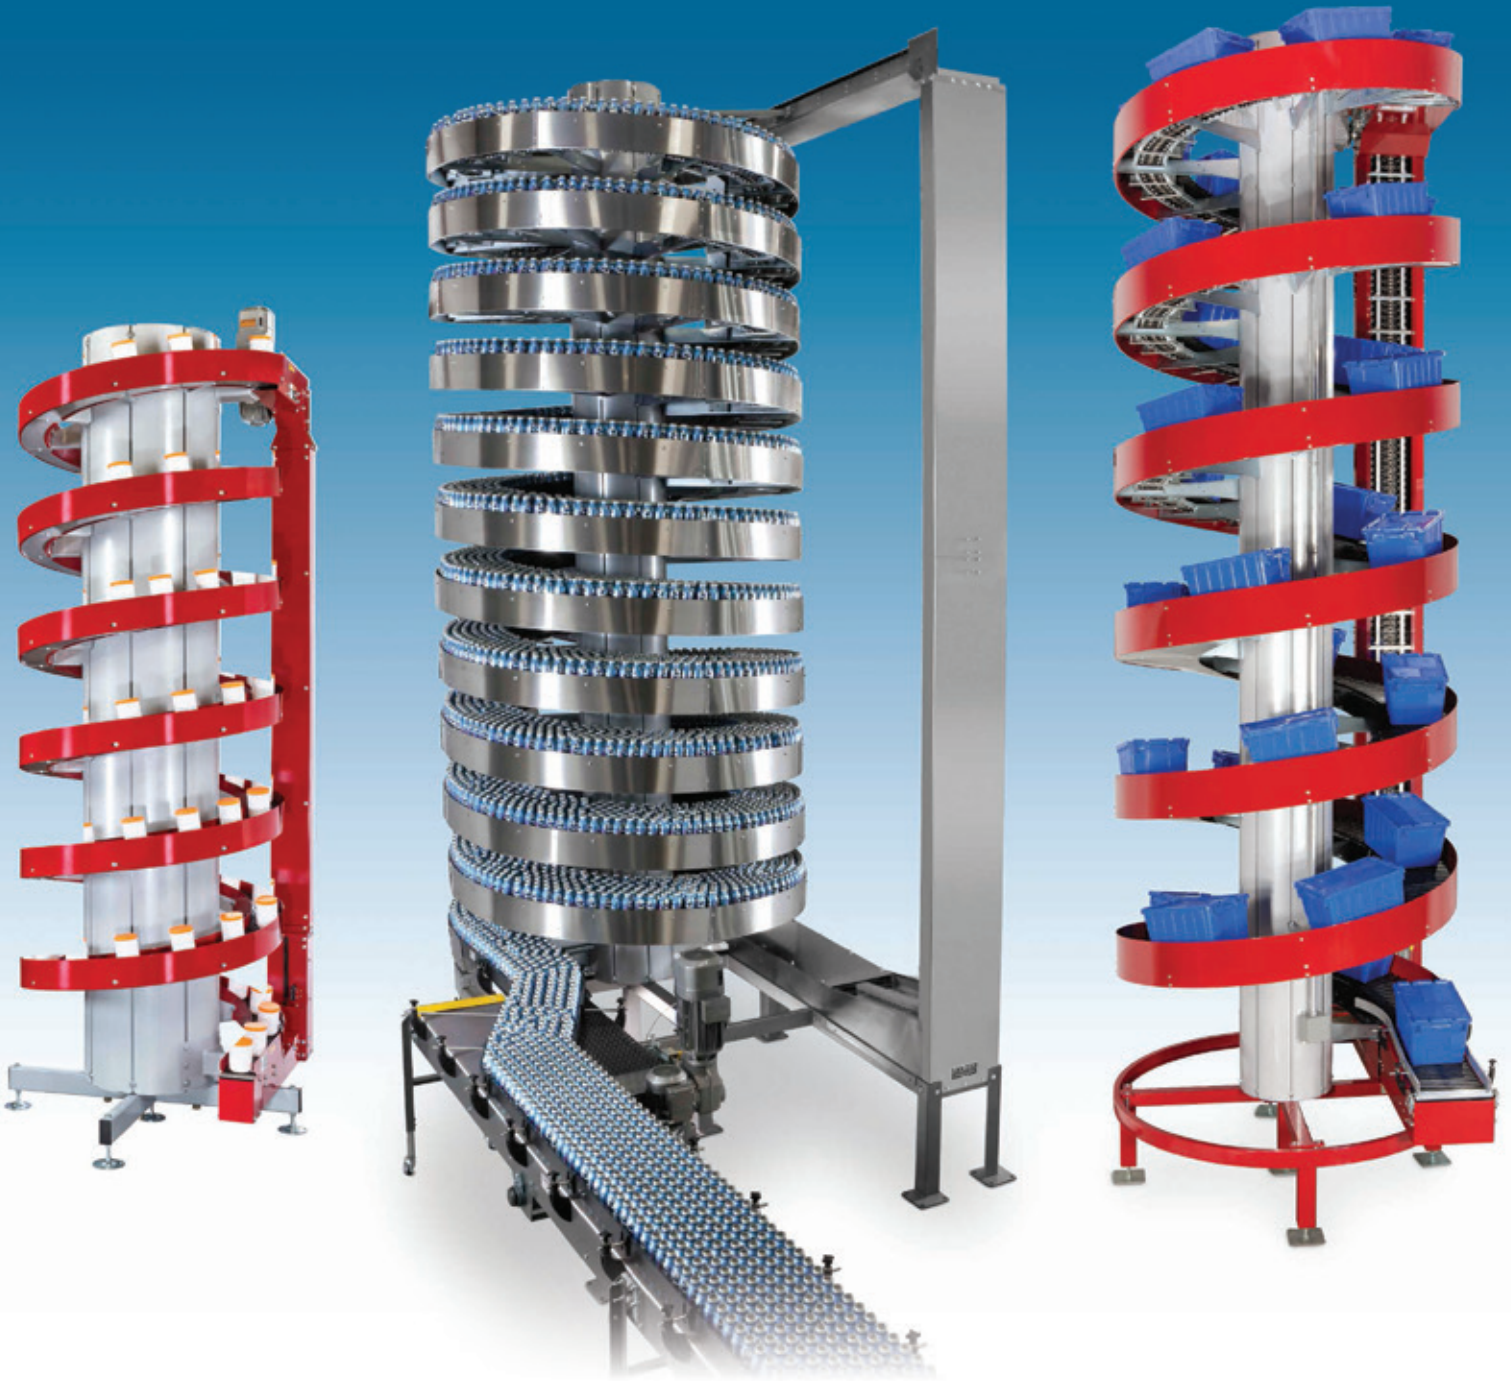

VERTICAL CONVEYING SOLUTIONS

Ryson Vertical Spiral Conveyors

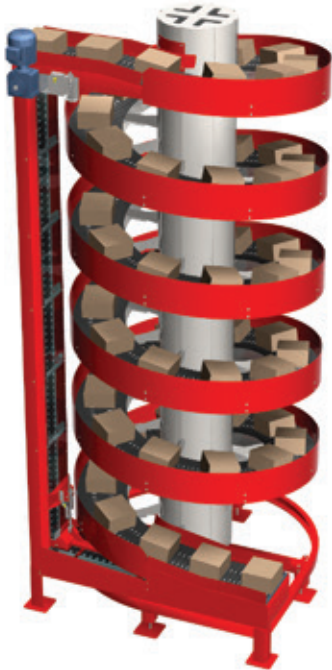

Unit Load Spirals:


The Ryson Unit Load Spirals can convey full and empty cartons, cases, trays, totes and all sorts of packaged goods in a continuous flow. Loads are conveyed reliably on our proprietary slat type belts, which come in 10 standard widths ranging from 6" to 30" depending on the product size. The slats are overlapping and provide an efficient and safe conveying surface at speeds up to 200 FPM.

Some models come in dual track version, which are the ultimate in space savings. Two tracks operate within one spiral structure. Each track has a separate drive and operates independently. Both tracks can go up or down and can optionally be reversible.

Mass Flow Spirals:

The Mass Flow Spirals convey full or empty bottles, cans, jars and other types of containers. Products are conveyed up or down in single file or in a continuous mass flow at a rate of up to 2,000 units per minute. This type of spiral is equipped with a nesting slat, providing a smooth flat conveying surface. The Mass Flow Spirals are equipped with extended in and outfeed tangents to facilitate reliable side transfer to and from adjoining conveyors without product tipping.

These Spirals are available in five different slat widths ranging from 6" to 20". They have a small footprint and provide considerable space savings when compared to conventional methods.

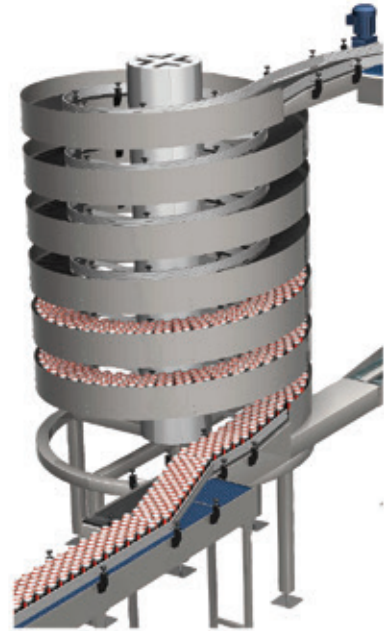

High Capacity Spirals:

The High Capacity Spirals are for the tough jobs and are in response to our customers' need to go higher and handle more weight. They can handle twice the weight capacity of our standard spirals at speeds up to 200 PFM.



Optionally, the High Capacity Spirals can be configured to allow loads to enter or exit the spirals at intermediate elevations. The Ryson Induction and Divert Out conveyors features an individually adjustable conveying surface to match the spiral pitch, assuring a safe and reliable product transfer.



Loads can enter or exit the spiral in the up or down rotation. These Spirals offer great space savings in multi-tiered order picking systems or multi-level manufacturing operations.

Narrow Trak Spirals:

The Ryson Narrow Trak Spirals are super compact vertical conveyors designed to handle small loads. They are great space savers with high throughput.

The nesting slats have the capacity to reliably end-transfer small cartons and packages or side-transfer small bottles or containers in a single file or in a continuous mass flow. All at speeds in excess of 200 FPM.


The Narrow Trak spirals offer a significantly larger elevation change capacity than what is currently available in the small package marketplace. They are also a good alternative to side gripper conveyors because they can run at high speeds and do not need to be adjusted for varying product sizes.

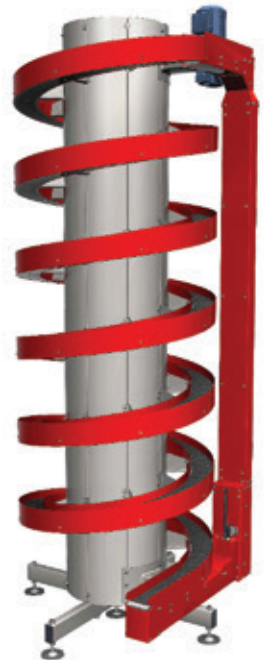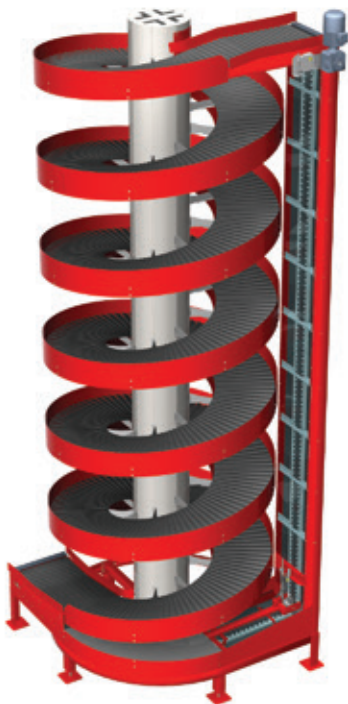

Features and Benefits:


Ryson Spiral Conveyors have many unique features and benefits highlighted in the following sections. Central to our design is the **Ryson proprietary slat style belts** designed with rolling friction without any sliding movements or wear-strips. This allows for high speeds, less energy, low noise, low maintenance and long life. Our value proposition is to deliver products with a low total cost of ownership.

Modular Design: An innovative modular design allows Ryson to customize with ease and can be economically modified in the field to accommodate changing needs. All spirals are made to order and are available in 4 basic configurations (A, B, C and D), accommodating most requirements relating to the location of the in and out feed tangents. All configurations can operate up or down in a clockwise or counterclockwise rotation and can optionally be reversible. The position and length of the in feed tangent on up spirals and out feed tangent on down spirals can be customized to meet specific layout requirements. Samples A-EX, B-MA and C-EX are shown.

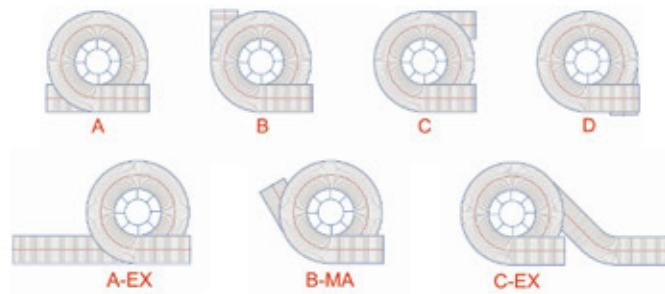

Proprietary Slat Belt: This innovative belt enables a low rolling friction operation without any sliding movements or wear strips. The belt is pulled by a heavy duty steel roller chain and the slats are supported by precision steel roller bearings which ride on a polyurethane surface. This arrangement effectively takes up the side forces created by a tight radius and at the same time increases the load carrying capacity of the belt up to 75 lbs per linear foot. This enables the spirals to start and stop fully loaded and facilitates high speed, low noise and long life.

Overlapping Slats: Overlapping slats are used on the Unit Load and High Capacity Spirals, providing an efficient and safe conveying surface for cartons, cases, trays, totes and all sorts of packaged products. Available in 8", 12", 16", 20", 24", 26 and 30" wide slats. Friction inserts can be optionally added when additional grip is required.

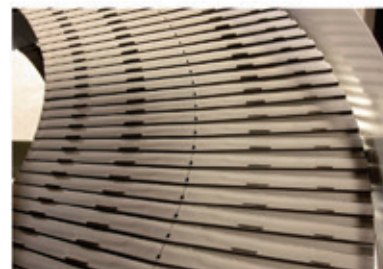


Nesting Slats: Nesting slats are used in the Mass Flow and Narrow Trak Spirals that convey small loads including loose bottles, cans, jars and similar containers. The conveying surface is flat without gaps, facilitating a smooth and reliable product side transfer. This can be done in a single file or in mass. They are available in 6", 9", 10", 16" and 20" wide slats.

Small Footprint: The proprietary low friction chain slat belt allow Ryson Spirals to operate within a small footprint, saving valuable floor space. See the chart on next page for specific dimensions on our most popular models.

Horizontal Entry and Exit: All Ryson Spirals are designed with a horizontal section at the in and outfeed. This assures a safe and reliable transition between the spiral and adjoining conveyors without product damage and undue wear.

Built in Protection: All Ryson Spirals are equipped with an automatic chain tensioning device and built-in overload protection as a standard.

One Drive: Only one drive motor is required, resulting in substantial savings in energy, controls and systems integration.

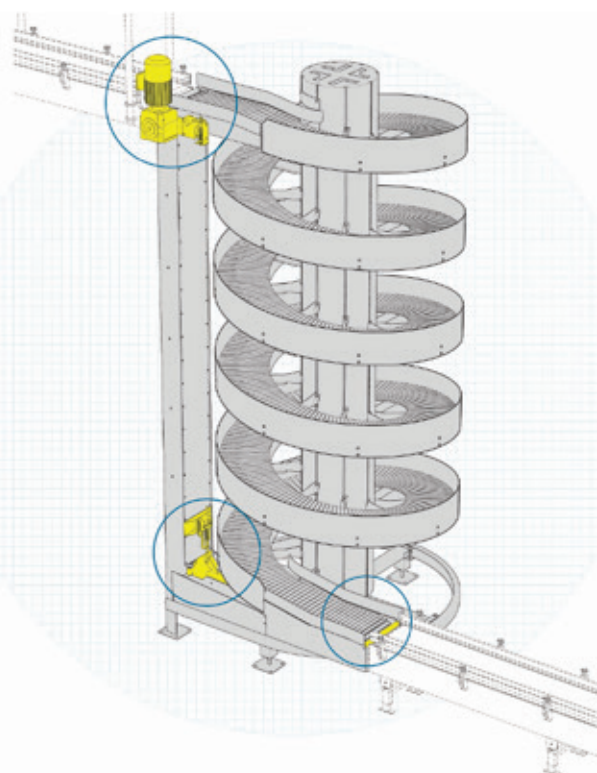

Easy to Install: Most spirals are shipped in one piece, pre-assembled and pre-tested, drastically reducing time and cost of installation.


Low Noise: Our proprietary chain slat belt assures a low noise operation, less than 75 db in most cases.

Easy to Field Modify: The Ryson modular design makes it easy to field modify our spirals in case of unplanned installation changes or to reconfigure and repurpose the spirals at a later date.

High Throughput: The spirals convey loads up or down in a continuous flow, facilitating high throughput. Many spirals can operate at speeds in excess of 200 FPM and are optionally reversible.


Low Maintenance and Long Life: The Ryson Spirals are designed for low maintenance and long life. Only high quality components are used throughout. All bearings are sealed for life and need no further lubrication. The chain is of heavy duty nickel plated construction and needs only infrequent lubrication. The slats are made of a nylon composite, need no maintenance and can easily be replaced as single components without the use of special tools. Ryson has a full staff of factory trained service technicians ready to assist. All of our service techs are PMMI Certified Trainers.


Controls and Integration: Most of our spirals are shipped without controls because they normally integrate with an overall conveyor control system. Our spirals always include an inverter duty gear motor and two proximity sensors, one for the automatic chain tensioner and one for the overload protection device. We offer a number of controls and pre-wiring options. Please refer to our website for more information. A Variable Frequency Drive (VFD) is required for proper operation of the spirals. All Ryson Spirals are thoroughly shop tested prior to shipment, but depend on proper integration with the overall conveyor system for optimum performance. Spiral integration instructions are available on www.ryson.com or give us a call to request a copy.

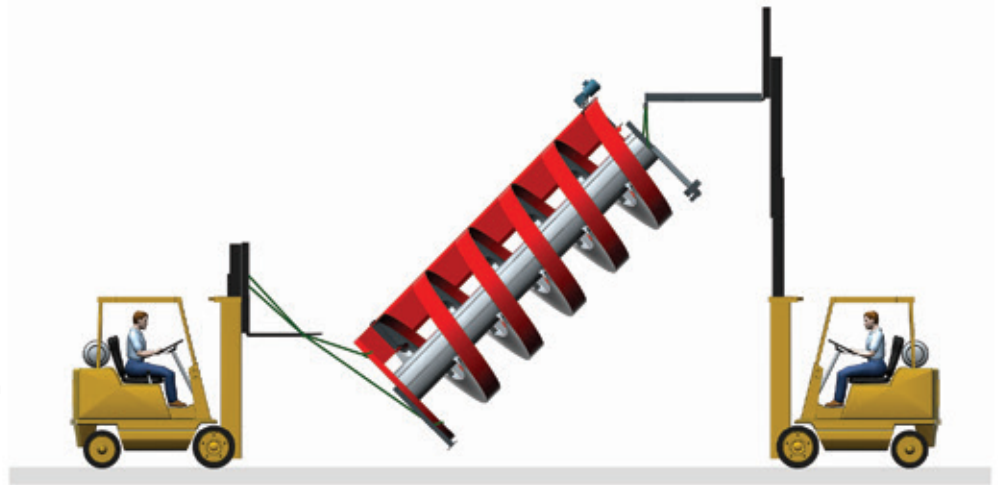

Type	Outside Diameter	Centerline Diameter	Slat Width	Frame Width
I100-150-NT	4'-2" (1270)	3'-8" (1100)	6" (150)	6" (160)
I200-230-NT	4'-9" (1450)	3'-11" (1200)	9" (230)	9" (240)
I200-300	5'-3" (1600)	3'-11" (1200)	12" (300)	15" (380)
I300-400	5'-11" (1800)	4'-3" (1300)	16" (400)	19" (480)
I500-400	6'-7" (2000)	4'-11" (1500)	16" (400)	19" (480)
I600-500	7'-3" (2200)	5'-3" (1600)	20" (500)	23" (590)
I700-150 NT	6'-2" (1870)	5'-7" (1700)	6" (150)	6" (160)
I700-400-HC	7'-3" (2200)	5'-7" (1700)	16" (400)	19" (480)
I700-600-HC	7'-11" (2400)	5'-7" (1700)	24" (600)	27" (680)
I800-650	8'-5" (2590)	5'-11" (1800)	26" (650)	29" (730)
I900-260-MF	7'-5" (2260)	6'-3" (1900)	10" (254)	11" (280)
I900-400-MF	7'-11" (2410)	6'-3" (1900)	16" (400)	17" (430)
2200-760-VWT	10'-0" (3050)	7'-3" (2200)	30" (760)	33" (790)
2300-500-MF	9'-4" (2840)	7'-7" (2300)	20" (500)	21" (530)

Chart displays the most common models.

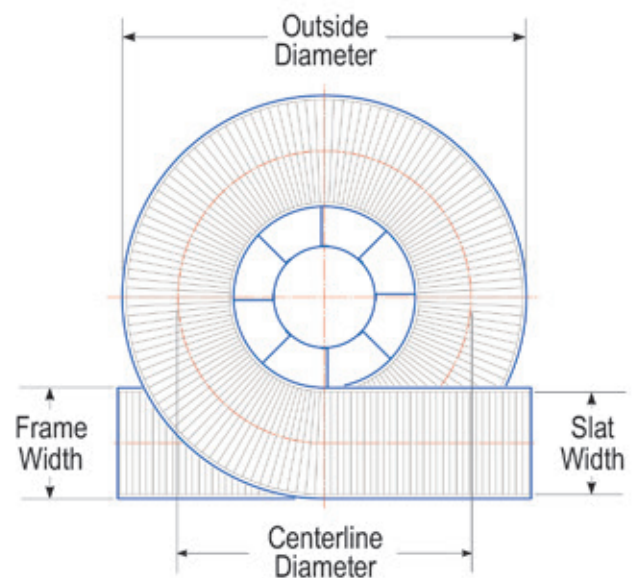

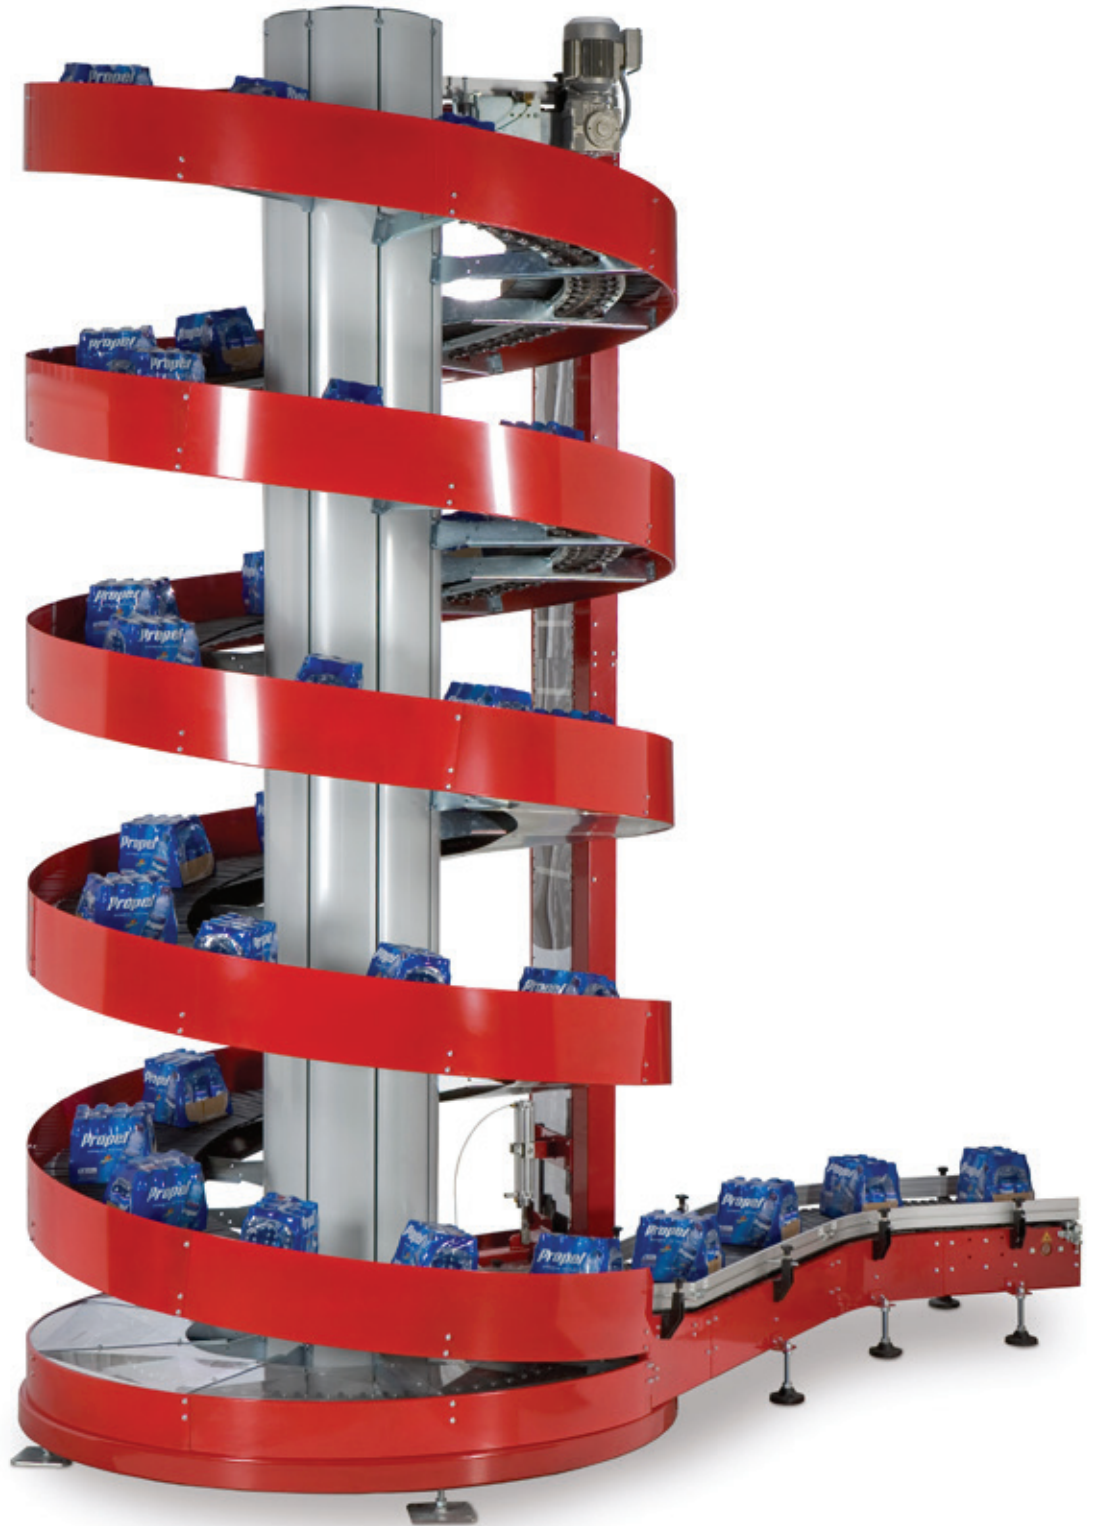

RYSON

INTERNATIONAL, INC

VERTICAL CONVEYING SOLUTIONS

Ryson is the number one Spiral Conveyor manufacturer in the USA.
Contact Advanced Equipment Company for assistance.



ADVANCED
EQUIPMENT COMPANY

1408 Center Park Dr
Charlotte, NC 28217

sales@aec-carolina.com
704-527-3141